



GCP-31 RPO+SC09

Rental Package Mains & Generator Protection & Control

- **J1939** (Volvo EMS2, mtu ADEC, Scania S6, Deutz EMR), mtu **MDEC** communications
- High wye, low wye, and delta configurations possible via discrete inputs
- Complete engine, generator, and mains protection and controller in one unit
- True RMS sensing of generator, busbar and mains voltage as well as generator and mains current
- Synchronization for one/two breakers
- Load management-automatic base load/peak shaving, import/export power control, automatic sequencing
- Load/var sharing for up to **8 generators** incl. auto start/stop
- Counters for kWh, engine starts, operating hours, maintenance call
- Analog inputs for oil pressure, coolant temperature, and fuel level
- Freely configurable discrete and analog alarm inputs
- Freely configurable relay and analog outputs
- PC and front panel configurable
- CAN bus based communication
- CE marked
- UL/cUL Listed

APPLICATIONS

The GCP-31 RPO+SC09 gset control is designed to meet the needs of the rental generator market. This control permits the operator to change the operating voltage, frequency, and generator configuration and protection schemes via discrete inputs..

Up to **8** gensets may be controlled through a network of GCP-31 RPO controllers. Load management features include isochronous load and var sharing, load-dependent start/stopping and emergency power/back up power generation

The GCP-31 has logic for one/two circuit breaker including open/closed transition and soft power transfer. Fully integrated communication to engine ECUs including [via CAN bus] standard SAE J1939, Deutz EMR, Scania S6, Volvo EMS2, mtu ADEC, mtu MDEC.

DESCRIPTION

Features

- True RMS 8x voltage (generator/busbar/mains)
- True RMS 4x current (generator/mains)
- Start/stop sequence for Diesel/Gas engines
- Engine pre-glow or purge control
- Battery voltage monitoring
- Speed control with overspeed monitoring
- Idle speed mode operation
- kWh/operation hours/start/maintenance counter
- Load dependent start/stop for up to **8 generators**
- Configurable trip/control set points
- Configurable delays for each protection/alarm
- Up to four voltage schemes selectable via DIs
- Two frequencies selectable via discrete input
- Magnetic/switching Pickup input
- Up to 12 configurable discrete alarm inputs
- 7 configurable/programmable relays
- Two-line LC display
- Synchroscope
- Push-buttons for direct control
- CAN bus communication
- Multi level password protection
- Language manager (English/German selectable)
- Slip synchronization / phase matching

DESCRIPTION (continued)

Protection ANSI

- 3/4-line measurements
- Mains**
 - Over-/undervoltage (59/27)
 - Over-/underfrequency (81O/U)
 - Phase/vector shift (78)
- Generator**
 - Over-/undervoltage (59/27)
 - Over-/underfrequency (81O/U)
 - Overload (32)
 - Reverse/reduced power (32R/F)
 - Unbalanced load (46)
 - Time-overcurrent (TOC) (50)

Controller

- Speed/frequency/real power
- Voltage/power factor cosphi
- Mains import/export power
- f/V droop via DI
- Load/var sharing for up to **8 generators**
- Isolated operation
- Soft-loading
- Mains parallel operation
- Open transition (break-before-make)
- Closed transition (make-before-break)
- 2 DIs for frequency / real power set point
- 2 DIs for voltage / power factor set point
- 2 configurable analog outputs (0/4 to 20 mA)
- Generator real power setpoint via 0/4 to 20 mA
- Mains import/export power via 0/4 to 20 mA
- Discrete outputs raise/lower for n/f/V/P/Q
- Analog outputs raise/lower for n/f/V/P/Q
- PWM outputs raise/lower for n/f/P
- 7 conf. analog measuring inputs (0/4 to 20 mA, Pt100, VDO-+)
- Event recorder with real time clock

SYNCONpanel mode





- This unit may be controlled by the SYNCONpanel (see Product Specifications 37185 for details)

SPECIFICATIONS

Accuracy	Class 1
Power supply	12/24 Vdc (9.5 to 32 Vdc)
Intrinsic consumption	max. 20 W
Ambient temperature	Operation: -20 to 70 °C
	Storage: -40 to 80 °C
Ambient humidity	95 %, non-condensing
Voltage	Rated (V_{rated}): 231/400 Vac
	V_{ph-ph} max. (UL): max. 173/300 Vac
	Rated $V_{ph-ground}$: 300 Vac
	Rated surge voltage: 4.0 kV
	Setting range (prim.): 0.050 to 65.000 kVac
Measuring frequency	50/60 Hz (40 to 70 Hz)
Linear measuring range up to	$1.3 \times V_{rated}$
Input resistance	0.7 M Ω
Max. power consumption per path	< 0.15 W
Current (rated values; I_{rated})5 A
Linear measuring range up to	$I_{gen} = 3.0 \times I_{rated}$
	$I_{mains} = 1.5 \times I_{rated}$
Load	< 0.15 VA
Rated short-time current (1 s)	$10 \times I_{rated}$
Discrete inputs	isolated
Input range	12/24 Vdc (6 to 32 Vdc)
Input resistance	approx. 6.8 k Ω
Analog inputs	freely scaleable
Type	0/4 to 20 mA, Pt100, VDO
Resolution	10 Bit

Relay outputs	potential free
Contact material	AgCdO
Load (GP)	2.00 Aac@250 Vac
	2.00 Adc@24 Vdc / 0.36 Adc@125 Vdc / 0.18 Adc@250 Vdc
Pilot duty (PD)	1.00 Adc@24 Vdc / 0.22 Adc@125 Vdc / 0.10 Adc@250 Vdc
Analog outputs	isolated
Type	0/4 to 20 mA, freely scaleable
Resolution	8/12 Bit (depending on model)
Max. load 0/4 to 20 mA	500 Ω
Insulating voltage	1,500 Vdc
Housing	Type APRANORM DIN 43 700
Dimensions	144x144x118 mm
Front cutout	138[+1.0]x138[+1.0] mm
Connection	screw/plug terminals depending on connector 1.5 mm ² or 2.5 mm ²
Front	insulating surface
Protection system	with proper installation
	Front
	IP42
	(sealed IP54; gasket kit = P/N 8923-1039)
	Back
	IP21
Weight	depending on version, approx. 1,000 g
Disturbance test (CE)	tested according to applicable EN guidelines
Listings	UL/cUL listed (File No.: E231544)

DIMENSIONS

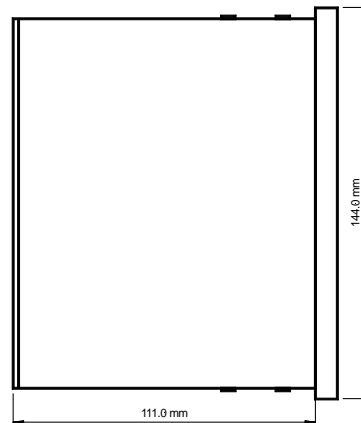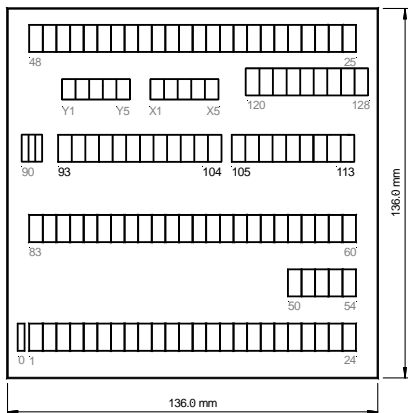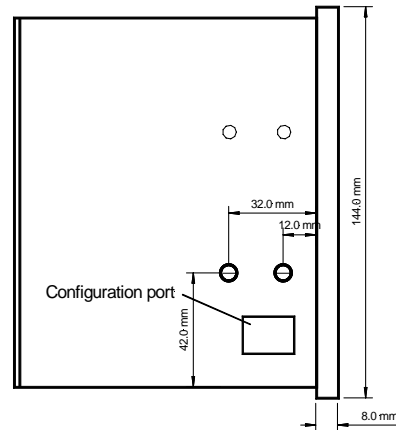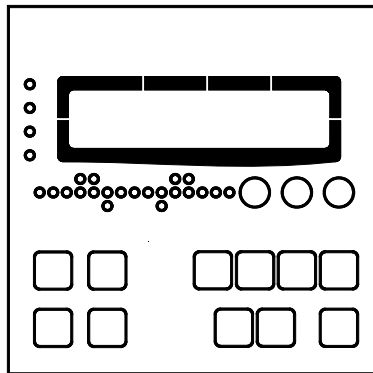

International
 Woodward
 PO Box 1519
 Fort Collins CO, USA
 80522-1519
 1000 East Drake Road
 Fort Collins CO 80525
 Ph: +1 (970) 482-5811
 Fax: +1 (970) 498-3058

Europe
 Woodward GmbH
 Handwerkstrasse 29
 70565 Stuttgart, Germany
 Ph: +49 (0) 711-789 54-0
 Fax: +49 (0) 711-789 54-100

Distributors & Service
 Woodward has an international network of distributors and service facilities. For your nearest representative, call the Fort Collins plant or see the Worldwide Directory on our website.

www.woodward.com/power

For more information contact:

Subject to technical modifications.

This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward Governor Company contractual or warranty obligation unless expressly stated in a written sales contract.

We appreciate your comments about the content of our publications. Please send comments including the document number below to stgt-doc@woodward.com

© Woodward

All Rights Reserved

37316C - 2007/2/Stuttgart

FEATURES OVERVIEW

GCP-31 RPQ+SC09	
Genset Control	
Control	
Breaker control logic	2
Synchronization	✓
Isolated single-unit operation	✓
AMF (auto mains failure operation)	✓
Stand-by operation	✓
Peak load op. (auto start/stop)	✓
Mains parallel operation	✓
Open transition (break-before-make)	✓
Closed transition (make-before-break)	✓
Softloading	✓
SYNCONpanel mode	✓
Accessories	
Start/stop logic for Diesel/Gas engines	✓
kWh counter	✓
Operating hours/start/maintenance counter	✓
Configuration via PC #1	✓
Event recorder, real time clock	50
Language manager (English/German)	✓
Protection	
Generator: voltage/frequency	✓
Mains: volt./freq./phase shift	✓
Generator: overload/unbalanced load	✓
Generator: reverse/reduced power	✓
Generator: time-overcurrent (TOC)	✓
Controller	
Discrete raise/lower: n/f & P	✓ #2
Discrete raise/lower: V & power factor	✓ #2
Analog raise/lower: n/f & P #2	✓
Analog raise/lower: V & Q #2	✓
PWM raise/lower: n/f & P #2	✓
f/V droop via DI	✓
Mains import/export power via 20 mA	✓
Mains import/export power control	✓
Load-dependent start/stop	✓
Active power setpoint 0/4 to 20 mA #3	✓
Load/var sharing for 8 generators	✓
I/O's	
Selectable frequencies via discrete input	2
Selectable voltages via discrete inputs	4
Magnetic/switching Pickup	✓
Discrete alarm inputs (configurable)	12
Relay outputs (configurable)	7
Analog inputs (configurable) #3	7
Analog outputs 0/4 to 20 mA (config.)	2
External operation mode selection via DI	✓
CAN bus comm., Guidance level #4	✓
CAN bus comm., Engine level #5	✓
Listings/Approvals	
CE Marked	✓
UL/cUL Listed	✓
Part numbers P/N	
Measuring inputs 400 Vac, ..5 A	8440-1764

#1 Cable incl. software necessary (DPC)
 #2 +/-20 mA and +/-10 Vdc and PWM signal (type and range configurable); bias/discrete setpoint via relay manager
 #3 [T1]-[T3] = 0/4 to 20 mA, [T4] = Pt100, [T5] = VDO fuel level, [T6] = VDO 0 to 180ohm, [T7] = VDO 0 to 380ohm; function of 20 mA inputs is configurable between alarm input, remote setpoint value for generator real power, mains import/export real power measuring value; others upon request
 #4 Remote monitoring, control, configuration (GW 4 could be used for several interfaces)
 #5 CAN bus connection to IKD1, mtu MDEC, mtu ADEC, Volvo EMS2, Scania EMS/S6, Deutz EMR2, AN SAE J1939

APPLICATION

Typical application for the GCP-31 RPQ+SC09

